

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199887015 B2
(10) Patent No. 714055

(54) Title
Improved structures of polymers made from single site catalysts

(51)⁶ International Patent Classification(s)
B32B 027/08 B65D 035/08
B32B 027/32 B65D 037/00
B65D 008/14 B65D 041/48
B65D 030/02

(21) Application No: 199887015 (22) Application Date: 1998.09.24

(30) Priority Data

(31) Number	(32) Date	(33) Country
082226	1993.06.24	US

(43) Publication Date : 1998.12.03
(43) Publication Journal Date : 1998.12.03
(44) Accepted Journal Date : 1999.12.16

(62) Divisional of:
199472118

(71) Applicant(s)
American National Can Company

(72) Inventor(s)
John P. Eckstein; Johnny Q. Zheng; Mark E. Nordness; Keith D. Lind; George H. Walbrun ; Mary E. Shepard; Gregory K. Jones; Gregory J. Seeke

(74) Agent/Attorney
PHILLIPS ORMONDE and FITZPATRICK, 367 Collins Street, MELBOURNE VIC 3000

(56) Related Art
US 4871705



AU9887015

(12) PATENT ABRIDGMENT (11) Document No. AU-B-87015/98
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 714055

- (54) Title
IMPROVED STRUCTURES OF POLYMERS MADE FROM SINGLE SITE CATALYSTS
- (51)⁶ International Patent Classification(s)
B32B 027/08 B32B 027/32 B65D 008/14 B65D 030/02
B65D 035/08 B65D 037/00 B65D 041/48
- (21) Application No. : 87015/98 (22) Application Date : 24.09.98
- (30) Priority Data
- (31) Number (32) Date (33) Country
082226 24.06.93 US UNITED STATES OF AMERICA
- (43) Publication Date : 03.12.98
- (44) Publication Date of Accepted Application : 16.12.99
- (62) Related to Division(s) : 72118/94
- (71) Applicant(s)
AMERICAN NATIONAL CAN COMPANY
- (72) Inventor(s)
JOHN P. ECKSTEIN; JOHNNY Q. ZHENG; MARK E. NORDNESS; KEITH D. LIND; GEORGE H. WALBRUN; MARY E. SHEPARD; GREGORY K. JONES; GREGORY J. SEEKE
- (74) Attorney or Agent
PHILLIPS ORMONDE & FITZPATRICK , 367 Collins Street, MELBOURNE VIC 3000
- (56) Prior Art Documents
US 4871705
- (57) Claim

ABSTRACT

Copolymers of ethylene and alpha olefins that have been formed by the polymerization reaction in the presence of a single site catalyst, such as a metallocene, are used to form collapsible dispensing containers and/or components thereof. Blends of the copolymers with propylene polymers are disclosed and used to form a body wall layer or a collapsible dispensing container head having good bond strength with a body wall layer formed of an ethylene polymer. Methods for improving the adhesion between collapsible dispensing container components, such as between body wall layer formed of an ethylene polymer and another body wall layer formed of a propylene polymer, or between a body wall layer formed of an ethylene polymer and a collapsible dispensing container head formed of a propylene polymer, are also disclosed.

AUSTRALIA

Patents Act

**COMPLETE SPECIFICATION
(ORIGINAL)**

Application Number:
Lodged:

Class Int. Class

Complete Specification Lodged:
Accepted:
Published:

Priority

Related Art:

Name of Applicant:

American National Can Company

Actual Inventor(s):

John P. Eckstein
Johnny Q. Zheng
Mark E. Nordness
Keith D. Lind
George H. Walbrun
Mary E. Shepard
Gregory K. Jones
Gregory J. Seeke

Address for Service:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Invention Title:

**IMPROVED STRUCTURES OF POLYMERS MADE FROM SINGLE SITE
CATALYSTS**

Our Ref : 552079
POF Code: 269236/81711

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

IMPROVED STRUCTURES OF POLYMERS MADE FROM SINGLE SITE
CATALYSTS

This application is a divisional application of Australian application
5 72118/94, the entire disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

Polymeric materials have many applications in packaging structures.
10 They are used as films, sheets, lidstock, pouches, tubes and bags. These
polymeric materials may be employed as a single layer or one or more layers in
a structure. Unfortunately, there are countless polymeric materials available.
Furthermore, resin suppliers frequently have a tendency to claim many more
applications for a product than the product is actually suitable for. In addition,
15 in view of the specialised applications and processing problems that are
encountered despite the suppliers' claims, one skilled in the art can not tell
whether a particular resin will be suitable for an application unless tested.
However, for various reasons there are frequently drawbacks to the use of
many of these polymeric materials. For example, ethylene vinyl alcohol is an
20 excellent oxygen barrier material for use in packaging food products. However,
this polymeric material can be affected by moisture that is present in the
atmosphere or the packaged product. As a result, it is frequently found that
some polymeric materials are better for certain applications than others.

One area where there is a need for suitable resins in film applications is
25 in the area of heat shrinkable films. Heat shrinkable polymeric films are
commonly used in packaging meats, particularly primal meat cuts and other
large pieces of meat. While this description will mainly detail the usage of films
for packaging meat and meat by-products, it will be understood that these films
are also suitable for packaging a myriad of other products,

including food products, and non-food products, for example, dentifrices, cosmetics and pharmaceuticals.

Some of the films embodying the present invention are intended to be used by meat packers in the form of heat shrinkable bags with one opened end, which bags are closed and sealed after insertion of the meat. After the product is inserted, air is usually evacuated from the package and the open end of the bag is closed. Suitable methods of closing the bag include heat sealing, metal clips, adhesives, etc. Heat is applied to the bag once sealing is completed to initiate shrinkage of the bag about the meat.

In subsequent processing of the meat, the bag may be opened and the meat removed for further cutting of the meat into user cuts, for example, for retail cuts or for institutional use.

Suitable shrink bags must satisfy a number of criteria. Many bag users seek a bag that is capable of surviving the physical process of filling, evacuating, sealing and heat shrinking. For example, during the shrinking process great stress can be placed on the film by the sharp edges of bone in the meat. The bag must also have sufficient strength to survive the material handling involved in moving the large cuts of meat, which may weigh a hundred pounds or more, along the distribution system. Because many food products including meat deteriorate in the presence of oxygen and/or water, it is desirable that the bags have a barrier to prevent the infusion of deleterious gases and/or the loss or addition of moisture.

Conventional packaging for many products has frequently been made of multiple layer films having at least three layers. These multiple layer films are usually provided with at least one core layer of either an oxygen barrier material such as a vinylidene chloride copolymer, ethylene vinyl alcohol, a nylon or a metal foil, preferably aluminum. Heat shrinkable meat bags,

for example, have generally used vinylidene chloride copolymers. The copolymer of the vinylidene chloride may, for example, be a copolymer with vinyl chloride or methyl acrylate. Collapsible dispensing containers in the form of tubes may or may not use one or more foil layers. The foil layers in addition to supplying an oxygen barrier also provide the dispensing tube with "deadfold", i.e., the property of a collapsible dispensing tube when squeezed to remain in the squeezed position without bouncing back. Collapsible dispensing tubes employing a foil layer are disclosed in U.S. Patents No. 3,172,571 and No. 3,347,419, the disclosures of which are incorporated herein by reference. However, collapsible dispensing tubes do not require a foil layer. They may employ only one or more layers of thermoplastic or polymeric materials.

Examples of such tubes are disclosed in U.S. Patents 4,418,841 and No. 4,986,053, the disclosures of which are incorporated herein by reference. Methods of making collapsible dispensing tubes are well known and are disclosed in the above and other U.S. patents.

Generally, foilless plastic tubes have a body wall which can be a single layer plastic sheet or film which can be extruded in tubular form and cut into desired lengths. Multilayer plastic sheet and film can be made by lamination, including coextrusion coating, processes, or by coextrusion processes such as cast coextrusion through a flat die, or tubular coextrusion through a tubular die. Single and multilayer sheet or film that has been cast or laminated typically is shaped about an elongated cylindrical mandrel and sealed to itself along a side seam to form a tubular body.

Single and multilayer sheet or film that is respectively extruded or coextruded through a tubular die can be extruded in near final dimensional and vacuum sized to final dimension. Single or multilayer sheet and film can be coextruded and blown as a larger tubular form, which can be cut lengthwise and formed into a tube as would be a flat sheet or film. The formed tubular body wall is joined to a head typically having a neck with a dispensing orifice, and a shoulder. One end of the tubular body is joined to the shoulder of the head. The head can be pre-formed by compression or injection molding. Usually, the tubular body is inserted into a die and a head is injection molded onto the end of the tubular body such that the head and tubular body are fused or bonded together. The die which forms the head can be one which is shaped to form a head

having an integral cap having an integrally formed hinge. Typically, the tube head is sealed by a cap, filled through the tube's lower open end, and sealed at that end. While collapsible dispensing tubes are generally made as described above, some collapsible dispensing tubes and some containers are made by an extrusion blow molding process in which a single or multilayer parison or preform is extruded and then blown in a mold into the desired shape of the finished container, for example, one having an integral body wall, shoulder, neck and closed bottom. Some containers including collapsible dispensing tubes, are made by injection molding such that they have an integral body wall, shoulder, and neck which can have an integrally formed hinge and cap, and an open bottom.

Outer layers of films and body walls of containers used in packaging food products can be any suitable polymeric material such as linear low density polyethylene, low density polyethylene, blends of these polyethylenes, and ionomers, including sodium and zinc ionomers. Such ionomers include Surlyn, ethylene vinyl acetate etc. In conventional shrink bags, the outer layers are generally linear low density polyethylene or blends thereof. Suitable outer layers for meat bags are taught by U.S. Patent No. 4,457,960 to Newsome, the disclosures of which are incorporated herein by reference.

While conventional films have been suitable for many applications, it has been found that there is a need for films that, for example, are stronger and more easily processed than conventional films. In meat bags, there is a need for films and bags that have superior toughness and sealability and the ability to undergo cross-linking without undue deterioration. Thus, it is an object of the present invention to provide improved structures, including single and multi-layer films, sheets, lidstock, and containers, for example, pouches, tubes and bags. In particular, there is a need for structures for use in shrink bags wherein the shrink bags are capable of withstanding production stresses and the shrink process.

It has also been found that there is a need for containers, for example, collapsible dispensing containers or tubes having good bond strength between a propylene polymer layer or component and an ethylene polymer component. Thus, another object of this invention is to provide improved polymeric structures with improved bonding properties. For example, it is known that in the packaging industry, it has been difficult to bond a structure, such as a collapsible dispensing tube head or layer, or simply a layer made of a propylene polymer, such as polypropylene or a propylene ethylene copolymer, directly to a structure, for example, a layer made of an ethylene polymer, for example, a low density polyethylene ("LDPE"). While it is known to add an ethylene polymer to a propylene polymer structure to improve adhesion to the

ethylene polymer structure, it has heretofore been necessary to add a major amount of the ethylene polymer to sufficiently improve the adhesion. This has been undesirable. In adding a major amount, the desired properties of the propylene polymer have been significantly diminished. For example, collapsible dispensing tube heads having an integral flip top cap integrally joined to the head by a living hinge are usually made of a propylene polymer, e.g., polypropylene or a propylene ethylene copolymer, because the material properties of the polypropylene permit the hinge to be flexed repeatedly over time without cracking or breaking. Adding a major amount of a polyethylene to the propylene polymer employed to form the tube head to obtain satisfactory adhesion to a polyethylene body wall layer results in diminished hinge flexibility and/or early hinge failure. Further, since tube heads made of propylene polymer heretofore could not be satisfactorily bonded directly to a collapsible dispensing tube body wall layer of polyethylene, the packaging industry has been limited in types of heads and head materials that can be employed, and in the types of body wall layer materials that can be bonded to propylene heads. It therefore is a main objective of this invention to provide good bonding of a structure, for example, a collapsible dispensing tube head, or a layer, comprised of a propylene polymer, to a structure, for example, a tube body wall layer comprised of ethylene polymer.

Another objective of the invention is to provide a packaging structure or film having a layer of propylene polymer which can be, or which is satisfactorily bonded to a contiguous layer of an ethylene polymer.

Another object of the invention is to provide a container, for example, a collapsible dispensing container or a collapsible dispensing tube head comprised of a propylene polymer, joined or which can be joined with good bond strength directly to a structure, for example, a layer, or a body wall or side wall layer of a container or tube, where the layer is comprised of a polyethylene.



Another object of this invention is to provide an above-mentioned collapsible dispensing container or tube which does not stress crack between its first ethylene polymer body wall layer and its propylene polymer head after the dispensing container or tube has been exposed to stress crack inducing agents.



Another object of the invention is to provide a collapsible dispensing container or tube such as mentioned above, whose head has an integral cap joined directly to the head by an integral living hinge which can undergo 10,000 flexing cycles without undergoing stress fracture or failure.



Yet another object of this invention is to provide a method for improving the adhesion between the above-mentioned structures without the use of an adhesive.

SUMMARY OF THE INVENTION

The structures of the present invention may be single or multilayer films, sheets, lidstock, pouches, containers, tubes and bags where at least one layer contains a polymer, usually

a copolymer, formed by a polymerization reaction in the presence of a single site catalyst such as a metallocene. Examples of such a polymer are ethylene and propylene polymers and copolymers thereof. One preferred copolymer is a copolymer of ethylene and an alpha olefin where such alpha olefin has a carbon chain length of from C₃-C₂₀. The structures of the present invention may also include blends of polymers and copolymers formed by a polymerization reaction with a single site catalyst or blends of a polymer and copolymer formed by a polymerization reaction with a single site catalyst and another polymeric material. Examples of suitable polymers for blending include: high and medium density polyethylene (HDPE, MDPE), linear low density polyethylene (LLDPE), low density polyethylene (LDPE), ethylene vinyl acetate (EVA), ultra low density polyethylene (ULDPE or VLDPE), polypropylene (PP) and ionomers such as Surlyn.

The present invention may also be a multilayer structure of at least two layers, or at least three layers wherein the core layer is a barrier layer. In one embodiment of the present invention, there may be a first outer layer of an ethylene or propylene polymer or copolymer formed by a polymerization reaction in the presence of a single site catalyst, a barrier layer and a second outer layer of a polymeric material. The second outer layer may be an ethylene or propylene polymer or copolymer formed by a polymerization reaction in the presence of a single site catalyst or a layer of another polymeric material such as high density polyethylene, medium density polyethylene, linear low density polyethylene, ultra low density polyethylene, low density polyethylene, ethylene vinyl acetate, an ionomer or blends thereof. The first outer layer may also be a blend of the ethylene copolymer with another suitable polymeric material such as described above. A preferred polymer formed by a single site catalyst is a copolymer of ethylene and an alpha olefin such as butene-1 or octene-1. Additional layers such as adhesive layers or other polymeric layers may be interposed in the structure between one or both of the outer layers or on top of one or both of the outer layers. The structure of the present invention may be

rendered oriented either uniaxially or biaxially and cross-linked by any suitable means, such as for example irradiation or chemical cross-linking.

The present invention includes a structure in the form of a collapsible dispensing container which can be in the form of a tube comprised of a layer of, or comprised of a polymer, usually a copolymer, formed by the polymerization reaction with a metallocene catalyst system or with a single site catalyst, for example, a metallocene. The polymer can be an ethylene or propylene polymer. The layer can be a blend of said ethylene polymer or copolymer with a polyolefin. The ethylene polymer can be a copolymer or interpolymers of ethylene and a C_3-C_{20}

alpha olefin. The ethylene polymer preferably is a copolymer of ethylene and butene-1, preferably a linear ethylene butene-1 copolymer. The polyolefin of the blend can be a propylene polymer which can be polypropylene, a propylene copolymer, for example, a copolymer of propylene and ethylene, or a terpolymer of propylene, for example, an elastomeric terpolymer derived from ethylene and propylene. The propylene polymer of the blend can comprise a major amount, preferably about 70 to 90 wt.%, and the ethylene polymer of the blend can comprise a minor amount, preferably about 10 to about 30 wt.%, of the blend. In a preferred blend, the propylene polymer, for example, the elastomeric terpolymer of propylene and ethylene, can comprise about 85 to about 90 wt.% of the blend, and the ethylene polymer, for example, a copolymer of ethylene and an alpha olefin, can comprise about 10 to about 15 wt.%, of the blend. A preferred propylene polymer of the blend can comprise a copolymer of about 75 wt.% polypropylene and about 25 wt.% polyethylene, based on the weight of the copolymer. The propylene copolymer can have a density of about 0.899 to about 0.903 g/cm³, a melt flow rate of about 2 g/10min and a DSC melting point of about 161°C. The copolymer of ethylene and an alpha olefin, preferably a linear ethylene butene-1 copolymer, can have a melt index of about 3.5 to about 4.5 dg/min, a density of about 0.900 to about 0.905 g/cm³, and a DSC peak melting point of about 92 to about 98°C.

The collapsible dispensing container or tube of the invention can have a body wall which is or includes a layer comprised of an ethylene polymer, sometimes referred to herein as a first ethylene polymer, and a contiguous layer comprised of a blend of a propylene polymer and an ethylene polymer, sometimes referred to herein as a second ethylene polymer.

The collapsible dispensing container or tube can be comprised of a head having a dispensing orifice and a shoulder, and a body wall layer joined directly to the head, the layer being comprised of a first ethylene polymer, and the head being comprised of a blend of a propylene polymer and a second ethylene polymer. In these containers, the second ethylene polymer of the blend is formed by the polymerization reaction with a metallocene catalyst system, or with a single site catalyst, for example, a metallocene. The containers of the invention can have a body wall layer comprised of a blend of about 85 to about 90 wt.% of a propylene terpolymer and about 10 to about 15 wt.% of the ethylene butene-1 copolymer. In the blend of the container or tube head, the propylene polymer can be a copolymer of about 75 wt.% polypropylene and about 25 wt.% polyethylene, based on the weight of the copolymer, and can comprise about 70 to about 80 wt.% of the blend, and the second ethylene polymer can be a copolymer of ethylene and an alpha olefin and can comprise about 20 to 30 wt.% of the blend.

The present invention includes a method for improving the adhesion between a first layer comprising a first ethylene polymer and a contiguous second layer comprising a propylene polymer, or for improving the adhesion between a collapsible dispensing container or tube head comprised of a propylene polymer and a collapsible dispensing tube body wall layer comprised of a first ethylene polymer, wherein the method can include blending with the propylene polymer which is to form the second layer or the tube head, a second ethylene polymer formed by the polymerization reaction with a metallocene catalyst system, or with a single site catalyst, which can be a metallocene. The method can also include blending with the first ethylene polymer which is to form the first layer, a propylene polymer, sometimes referred

to herein as a second propylene polymer, formed by the polymerization reaction with a metallocene catalyst system, or with a single site catalyst, which can be a metallocene. The preferred method comprises blending a second ethylene polymer with the propylene polymer which is to form the second layer, or the tube head.

In the structures, containers and methods of the present invention, the tube head can have an integral cap that is integrally joined to the head by a living hinge.

BRIEF DESCRIPTION OF THE DRAWINGS



Figure 1 is a vertical sectional view of a three layer structure of the present invention.



Figure 2 is a vertical sectional view of a five layer film of the present invention.



Figures 3-6 are examples of the structure of metallocene catalysts used in the polymerization of the polymer used in the structures of the present invention.



Figure 7 is a vertical sectional view taken through a two layer film of the present invention.

Figure 8 is a front elevational view, with portions broken away and portions in vertical section, of a collapsible dispensing tube of the invention.

Figure 9 is an enlarged view of encircled portion of the head and body wall of the collapsible dispensing tube of Figure 8.

Figure 10 is a vertical sectional view, with portions broken away, of an alternative collapsible tube of the invention.

DETAILED DESCRIPTION OF THE INVENTION

The structures of the present invention include films, sheets, lidstock, pouches, containers, tubes and bags. These structures may be a single layer or multi-layer structure. The structures are comprised of polymers that have been polymerized in the presence of a single site catalyst, such as a metallocene. A metallocene is a complex organometallic molecule typically containing zirconium or titanium, with a pair of cyclic alkyl molecules. More specifically,

metallocene catalysts are usually compounds with two cyclopentadiene rings fixed to the metal. These catalysts are frequently used with aluminoxanes as a co-catalyst or an activator. One suitable aluminoxane is a methylaluminoxane (MAO). Besides, titanium and zirconium, hafnium may also be used as the metal to which the cyclopentadiene is bonded. Alternative metallocenes may include Group IVA, VA and VIA transition metals with two cyclopentadiene rings. Also mono-cyclopentadiene rings or silyl amides may alternatively be in the metallocene instead of two cyclopentadienes. Other metals to which the cyclopentadiene may be attached may include the metals in the lanthanide series. Figures 3, 4, 5 and 6 show representative metallocenes that are suitable single site catalysts.

While the reaction mechanism is not completely understood, it is believed that the metallocene, single site catalyst confines the copolymerization reaction to a single site over the polymer thus controlling comonomer placement and side chain length and branching. The copolymers formed from metallocene single site catalysts are highly stereo regular products with narrow molecular weight distribution. The metallocenes can be used to polymerize ethylene, propylene, ethylenic and acetylenic monomers, dienes and carbon monoxide. Comonomers with ethylene and propylene include styrene, substituted styrene, vinyl, acrylonitrile, methyl acrylate,

methyl methacrylate and 1,4-hexadiene. The metallocene single site catalysts are capable of producing isotactic polymers and syndiotactic polymers, i.e., polymers in which the crystalline branches alternate regularly on both sides of the back bone of the polymer. There are two general types of single site catalyst reactions. The first are nonstereoselective catalyst reactions which have been developed by Exxon and Dow and which are used to make Exxon's Exact resins and Dow's CGCT resins. See Figs. 3 and 4. The second type of reactions are stereoselective catalysts developed by Hoechst and Fina for stereo specific polymerization particularly of polypropylene and other olefins such as butene-1, and 4 methylpentene-1. See, e.g., Figures 5 and 6.

The ethylene alpha olefins polymerized by a single site catalyst have low crystallinity and a density that ranges from 0.854 to 0.97 gm/cc. Although this density range is similar to conventional ethylene polymers, i.e., LDPE, LLDPE and ULDPE, the polymers in the structures of the present invention have a narrow molecular weight distribution and homogeneous branching. The molecular weight distribution of the preferred polymers may be represented by the formula

$$\text{MWD } Mw/Mn = <2.5.$$

The preferred polymers can have a MWD of from about 1.97, more preferably about 2.0 to about 2.2.

In addition, the melt processability of these polymers (I_{10}/I_2) has a range of about 5.5 to about 12 while conventional homogenous polymers are generally less than 6.5 at an MWD of 2. The melt tension of these polymers is in the range of about 1.5 to 3.5 grams.

The MWD of these polymers may be determined using a Waters 150 GPC at 140°C with linear columns (103₆ A-10₆ A⁹) from Polymer Labs and a differential refractometer detector. Comparison of the MWD of a 1MI, 0.920 density CGCT polymer with that of 1MI,

0.920 density conventional LLDPE illustrates the very narrow MWD of the CGCT polymers which usually have a Mw/Mn of approximately 2 compared to 3 or greater for LLDPE.

A preferred ethylene copolymer is a copolymer of ethylene and a C₁ to C₂₀ alpha olefin. A preferred copolymer is a low modulus ethylene octene copolymer sold by Dow. This copolymer is formed by Dow's constrained-geometry catalyst technology which uses a single site catalyst such as cyclo-pentadienyl titanium complexes. As best understood, Dow's constrained geometry catalysts are based on group XV transition metals that are covalently bonded to a monocyclopentadienyl group bridged with a heteroatom. The bond angle between the monocyclopentadienyl group, the titanium center and the heteroatom is less than 115°. When the alpha olefin is present in the copolymer in the range of about 10 to 20% by weight, these copolymers are referred to as plastomers. When the percent alpha olefin is greater than 20% these copolymers are called elastomers. The preferred ethylene octene copolymer has the octene comonomer present in an amount less than 25%. Examples of the Dow ethylene octene copolymer have the following physical properties.

DENSITY g/cc	MOLECULAR WEIGHT DISTRIBUTION	MELT INDEX	MELT FLOW RATIO	MELT STRENGTH
Polymer 1.				
0.920	1.97	1.0	9.5	1.89
0.910	1.90	1.0	7.9	1.68
0.902	2.10	1.0	7.6	1.68

Molecular weight distribution is defined as the ratio of weight average molecular weight to number average molecular weight. The lower the figure, the narrower the molecular weight distribution. Melt flow ratio is defined as the ratio of melt index, as tested with a 10-kg load to the melt index with a 2-kg load. The higher the ratio, the more processable the material. Melt flow ratio is defined as melt tension measured in grams. The higher the number the greater the

melt strength. Other suitable resins are the Exact resins sold by Exxon. Some of these resins have the following characteristics:

Property	Typical properties of Exact medical grade polyethylenes					
	Value by grade					
	4028	4022	4021	4023	4024	4027
Melt index (D1238) *	10	6	22	35	3.8	4
Density, g./cc. (D-1505)	0.880	0.890	0.885	0.882	0.885	0.895
Hardness (0-2240)						
Shore A	78	84	84	80	83	89
Shore D	29	35	36	27	35	39
Tensile Strength at break, p.s.i. (D-638)	2220	1700	3260	620	2840	2200
Tensile elongation at break, % (D-638)	>800	>800	>800	>800	>800	>800
Tensile impact, ft.-lb./sq. in. (D-1822)	145	130	350	280	300	340
Flexural modulus, p.s.i. (D-790)	5040	4930	3980	3100	4180	7230
Vicat softening point °F. (D-1525)	138	168	158	138	158	181

*:ASTM test method

The structure of the present invention is comprised of an ethylene, propylene, or styrene polymer or copolymer formed by a polymerization reaction in the presence of a single site catalyst preferably a metallocene. (The so-formed polymer or copolymer is sometimes referred to herein as the second polymer, for example as the second ethylene polymer, or as the second propylene polymer, to differentiate it from an ethylene or propylene polymer or copolymer that is not so formed, the latter sometimes being referred to as a first ethylene polymer or a first propylene polymer.) Ethylene may be copolymerized with any suitable monomer such as C₃-C₂₀ alpha olefin including propylene, butene-1, 1-pentene, 4-methyl pentene-1, hexene-1 and octene-1. A preferred comonomer is octene-1. Another preferred

comonomer is butene-1. The preferred ethylene alpha olefin copolymer of the present invention has a density in the range of .880 gm/cc to about .920 gm/cc, a more preferred range of .890 gm/cc to about .915 gm/cc and a most preferred range of about .900 gm/cc to about .912 gm/cc.

Figure 1 shows a cross section of a three layer coextruded structure. Layer 14 is the core layer which may be a barrier layer that minimizes the transmission of oxygen through the structure. Preferred barrier materials are polyvinylidene chloride copolymers such as copolymers of vinylidene chloride and vinyl chloride or an alkyl acrylate such as methyl acrylate. Other preferred barrier materials include ethylene vinyl alcohol, nylon or a metal foil such as aluminum. Layer 14 may also be a copolymer of ethylene and styrene formed using a single site catalyst in the polymerization reaction. The copolymer of vinylidene chloride may also be polymerized by the polymerization reaction in the presence of a single site catalyst. In addition, layer 14 may also be a polystyrene formed by a polymerization reaction in the presence of a single site catalyst. One such polystyrene is the crystalline syndiotactic polystyrene sold by Idemitsu Petro-Chemical Co., Tokyo, Japan.

On opposite sides of the core layer 14 of Figure 1 are layers 12 and 16. At least one of these layers 12 is a polymer formed by a polymerization reaction in the presence of a single site catalyst. The remaining layer 16 may be any suitable polymeric material such as a polyester, co-polyester, polyamide, polycarbonate, polypropylene, propylene-ethylene copolymer, ethylene-propylene copolymer, combinations of polypropylene and ethylene vinyl acetate copolymer, ultra low density polyethylene, low density polyethylene, medium density polyethylene, high density polyethylene, linear low density polyethylene copolymers, linear medium density polyethylene copolymer, linear high density polyethylene copolymer, ionomer, ethylene acrylic acid copolymer, ethylene ethyl acrylate copolymer, ethylene methyl acrylate copolymer, or ethylene methacrylic acid copolymer.

In an alternate embodiment, the layer 12 may be a blend of a polymer formed by a polymerization reaction in the presence of a single site catalyst and a suitable polymeric material such as is identified in connection with the description of layer 16 above.

As seen in Figure 2, the structure may also include embodiments which have a fourth layer 28 over the first layer 22 and a fifth polymeric layer 20 over the third layer 26. The composition of the fourth layer 28 may be selected from the same group of materials from which the composition of the first layer 12 or third layer 16 is selected, and the fifth layer 30 may also be the same composition as the first layer 22 or the third layer 26.

In an alternate embodiment of Figure 2, the five layer structure may have a first layer 28 similar in composition to layer 12 of Figure 1, i.e., the film may have a first layer of a polymer formed by the polymerization reaction with a single site catalyst or blends thereof with another suitable polymeric material. One or both of the second 22 and fourth 26 layers may be an adhesive layer.

The composition of adhesive layers 22 and 25 is selected for its capability to bond the core or barrier layer 24 to the surface layers 28 and 30. A variety of the well known extrudable adhesive polymers adhere well to the core or barrier layer 24. Thus, if for example layer 30 is a polypropylene, an adhesive polymer based on polypropylene is desirably selected for layer 26. Examples of such adhesives are the extrudable polymers available under the trade designations Admer QF-500, QF550, or QF-551 from Mitsui Petrochemical Company, or Exxon 5610A2.

If the composition of layer 28 or 30 is an ethylene based polymer or copolymer, an adhesive polymer based on ethylene is preferably selected for layer 22, including ethylene homopolymers and copolymers. Such a preferred adhesive composition is an ethylene vinyl

acetate copolymer containing 25% to 30% by weight vinyl acetate. Other ethylene based homopolymers and copolymers modified to enhance adhesion properties are well known under the trade names of, for example, Bynel and Plexar. Typical base polymers for these extrudable adhesives are the polyethylene and the ethylene vinyl acetate copolymers. Such adhesive polymers, including the polypropylene-based polymers, are typically modified with carboxyl groups such as anhydride. Also acceptable as adhesives are ethylene methyl acrylate copolymers (EMA).

Additional layers may also be present in the structures of the present invention.

For example, the present invention contemplates 4, 6, 7, 8, and higher numbers of layers in the film of the present invention and different combinations of layer structures may also be present.

For example, there may be more than one barrier layer, i.e., two layers of polyvinylidene chloride copolymers, two layers of foil or two layers of EVOH or nylon. Alternatively, there may be a layer of EVOH and a layer of a polyvinylidene chloride copolymer or a polyamide or a polystyrene and other combinations of the core materials. The additional layers of the present

invention also encompass more than one polymer formed by the polymerization reaction in the presence of a single site catalyst. The polymers may be in a layer alone or in the form of a blend.

Suitable polymers for blending with an ethylene polymer formed in a polymerization reaction with a single site catalyst include other ethylene polymers formed in a polymerization reaction with a single site catalyst, LDPE, LLDPE, ULDPE, EVA, ionomers, ethylene copolymers, ethylene methyl acrylate (EMA), ethylene acrylic acid (EAA), ethyl methyl acrylic acid (EMAA), propylene polymers, e.g., polypropylene, (PP), ethylene normal butyl acrylate (ENBA), and ethylene propylene copolymers (PPE). Suitable polymers for blending with a propylene polymers formed in a polymerization reaction with a single site catalyst include ethylene propylene copolymers.

Preferred blends using EVA's are those having lower VA content as they tend to yield EVA layers having better hot strength. EVA'S having higher VA content tend to yield EVA layers having increased adhesion to for example, the vinylidene chloride copolymer layer. EVA's having virtually any amount VA will have better adhesion to the vinylidene chloride copolymer layer than an ethylene homopolymer. However, good interlayer adhesion is considered desirable in the invention, and thus, steps are usually taken to enhance adhesion where no unacceptable negative effect is encountered. Thus, higher VA contents, in the range of 6% to 12* vinyl acetate are preferred, a melt index of less than 1 is also preferred. While blend amounts are shown herein in weight percent, VA contents are mole percent. Especially preferred EVA's have VA content of 7% to 9% and melt index of 0.2 to 0.8. Blends of EVA's to make up the EVA component of layers 16 and 18 are acceptable.

The structure of the present invention may be formed by any conventional process. Such processes include extrusion, coextrusion, extrusion coating, extrusion lamination, adhesive lamination and the like, and combinations of processes. The specific process or processes for making a given film which is neither oriented nor cross-linked can be selected with average skill, once the desired structure and compositions have been determined.

When the structure of the present invention is a film, the film may also be oriented either uniaxially or biaxially. Orientation can also be done by any conventional process for forming multiple layer films. A preferred process includes the steps of coextrusion of the layers to be oriented, followed by orientation in one of the conventional processes such as blown tubular orientation or stretch orientation in the form of a continuous sheet, both being molecular orientation processes. The double bubble technique disclosure in Pahlke, U.S. Patent No. 3,456,044 is suitable for use in producing the film of this invention. The films may also be formed by a tubular water quench process. In this process the film may be extruded downwardly as a tube formed by an annular die, and carried into a water quench tank, generally with a

cascade of water on the outside surface providing initial cooling. The flattened tape is withdrawn from the quench bath, is reheated (normally in a second water bath) to its orientation temperature, is stretched in the machine direction between two sets of rolls that are so rotated as to establish a linear rate differential therebetween, and is simultaneously oriented in the transverse, or cross-machine, direction as an inflated bubble trapped between the nips of the rolls. In accordance with conventional practice the film will usually be cooled by air in the orientation zone.

The film of the present invention may also be oriented and/or cross-linked. The first step is the formation of a multiple layer film. The formation of the multiple layer film, is usually most easily accomplished by coextrusion of the desired layers. Other formation processes are acceptable so long as the resulting oriented film at the conclusion of fabrication processing is a unitary structure.

The second step is orienting the multiple layer film. One method for accomplishing orientation is by heating the film to a temperature appropriate to molecular orientation and molecularly orienting it. The film may then be optionally heat set by holding it at an elevated temperature while its dimensions are maintained. The orientation step is preferentially carried out in line with the first step, which is the film formation step of the process.

The third step is subjecting the formed and oriented multiple layer film, to electron beam irradiation.

The amount of electron beam irradiation is adjusted, depending on the make-up of the specific film to be treated and the end use requirement. While virtually any amount of irradiation will induce some cross-linking, a minimum level of at least 1.0 megarads is usually

preferred in order to achieve desired levels of enhancement of the hot strength of the film and to expand the range of temperature at which satisfactory heat seals may be formed. While treatment up to about 50 megarads can be tolerated, there is usually no need to use more than 10 megarads, so this is a preferred upper level of treatment, the most preferred dosage being 2 to 5 megarads.

The third step of subjecting the film to electron beam irradiation is performed only after the multiple layer film has been formed, and after molecular orientation, in those embodiments where the film is molecularly oriented. It should be noted that, in the irradiation step, all of the layers in the film are exposed simultaneously to the irradiation sources, such that irradiation of all the layers of the film takes place simultaneously.

In one embodiment of the process, the second step of orientation may be omitted and the unoriented multiple layer film may be cross-linked by irradiation treatment to produce a cross-linked, unoriented, multiple layer film.

EXAMPLES

Multilayer films may be prepared according to the present invention. Biaxially stretched three layer films may be prepared by a "double bubble" process similar to that disclosed in U.S. Patent No. 3,456,044 by coextruding the following compositions through a multilayer die, biaxially stretching the coextruded primary tube. The films may also be irradiated if desired.

EXAMPLE 1

- Layer 1 - Copolymer of ethylene and an alpha olefin such as Hexene-1 or Octene-1 formed by the polymerization reaction in the presence of a single site catalyst or metallocene (hereinafter CEO)
Layer 2 - Vinylidene chloride - methyl acrylate (VDC-MA) copolymer
Layer 3 - Polyolefin. This film may be biaxially stretched and if necessary irradiated.

EXAMPLE 2

- Layer 1 CEO
Layer 2 VDC-MA
Layer 3 ULDPE-EVA blend

EXAMPLE 3

- CEO
VDC-MA
CEO

EXAMPLE 4

- CEO-EVA blend
VDC-MA
CEO-EVA blend

EXAMPLE 5

- LAYER 1 CEO
LAYER 2 Nylon
LAYER 3 CEO

EXAMPLE 6

- CEO
Nylon
ULDPE-EVA

EXAMPLE 7

- CEO-EVA blend
Nylon
CEO-EVA blend

EXAMPLE 8

- LAYER 1 Polyolefin
LAYER 2 Styrene copolymer formed by the polymerization reaction with a single site catalyst

EXAMPLE 9

- Polyolefin
Propylene copolymer formed by the Polymerization

reaction with a single
site catalyst

LAYER 1 Polyolefin

Polyolefin

EXAMPLE 10

LAYER 1 CEO
LAYER 2 CEO
LAYER 3 CEO

EXAMPLE 11

CEO
EVOH
ULDPE-EVA Blend

EXAMPLE 12

CEO-EVA Blend
EVOH
CEO-EVA Blend

EXAMPLE 13

LAYER 1 CEO
LAYER 2 Tie
LAYER 3 PVDC Copolymer
or EVOH
LAYER 4 Tie
LAYER 5 ULDPE-EVA Blend

EXAMPLE 14

CEO
Tie
PVDC Copolymer
or EVOH
Tie
CEO

EXAMPLE 15

CEO-EVA Blend
Tie
PVDC Copolymer
or EVOH
Tie
CEO-EVA Blend

EXAMPLE 16

LAYER 1 EVA-ULDPE
LAYER 2 ULDPE or CEO
LAYER 3 PVDC Copolymer or EVOH
LAYER 4 EVA
LAYER 5 CEO or blend of CEO and EVA

The following examples may also be prepared in
accordance with the present invention:

EXAMPLE 17

Meat Film - Forming Web
Formed by TWQ Process
(Tubular Water Quench Process)

LAYER 1 Nylon
LAYER 2 Tie
LAYER 3 EVOH
LAYER 4 Tie
LAYER 5 CEH or CEO

CEH is a copolymer of ethylene and Hexene-1, formed

by the polymerization reaction in the presence of a single site catalyst or a metallocene. Other alpha olefins can be polymerized with the ethylene also.

EXAMPLE 18-20

Innerliner Films - These films can be formed either on a blown film line or by using a tubular water quench.

LAYER 1 HDPE
LAYER 2 Blend of CEE or CEO and EVA and polybutylene

LAYER 1 HDPE
LAYER 2 CEE or CEO and polybutylene

LAYER 1 HDPE
LAYER 2 CEE or CEO

EXAMPLE 21 and 22

Meat - Non Forming Top Web film

LAYER 1 PVDC coated PET
LAYER 2 Adhesive (lamination)
LAYER 3 CEO or CEE

This film may be formed by adhesive laminating a film formed of a copolymer of ethylene and an alpha olefin with the PVDC coated PET film.

LAYER 1 PVDC coated PET
LAYER 2 LDPE - extrusion laminated
LAYER 3 LDPE/CEE or CEO coextrusion

This film can be formed by extrusion laminating a film of PVDC coated PET or LDPE.

EXAMPLE 21

Layer 1 - Blend of two or more copolymers of ethylene and an alpha olefin polymerized in the presence of a single site catalyst or metallocene such as CEO with either CEB or CEB. CEB is a copolymer of ethylene and butene-1 formed by a polymerization reaction in the presence of a single site catalyst or a metallocene.

EXAMPLE 24

Layer 1- Blend of a copolymer of ethylene and an alpha olefin formed by a polymerization reaction in the presence of a single site catalyst or a metallocene with Polyethylene or other polyolefin such as EVA, EMA, EAA, EMMA, ionomers, ENBA, PP or PPE.

The films of example 23 and 24 can either be single layer films or multi layer films where additional layers are present on layer 1.

Figure 7 shows a cross section of a preferred structure, generally designated 32, having two layers. The structure can be or comprise the body wall 34 of a container, for example, the collapsible dispensing container shown in the form of a tube 36 in Figure 8. Structure 32 is comprised of a structure or layer 38 comprising a first ethylene polymer, and a contiguous structure or layer 40 comprised of a propylene polymer blended with a second ethylene polymer formed by a polymerization reaction with a metallocene catalyst system, or with a single site catalyst, preferably a metallocene. The propylene polymer of layer 40 can comprise homopolymers and copolymers of propylene, such as polypropylenes, copolymers of propylene and ethylene (including copolymers of ethylene and propylene), and propylene terpolymers, for example, elastomeric terpolymers prepared or derived from unsaturated monomers comprising propylene and ethylene. The propylene polymer can also comprise blends of these polymers. Layer 4 of Figure 7 is an example of layer 1 of Example 24.

The second ethylene polymer of the blend of layer 40 preferably comprises a copolymer or interpolymer of ethylene. Preferably, the ethylene polymer is a copolymer or interpolymer of ethylene and an alpha olefin, especially a C₃-C₂₀ alpha olefin. Preferred copolymers of ethylene and alpha olefins are ethylene butene-1 copolymers, particularly linear ethylene butene-1 copolymers.

The first ethylene polymer of layer 38 can comprise a low, linear low, very low or ultra low density polyethylene, a medium density polyethylene, a high density polyethylene, an ionomer, or any suitable blend or combination of such ethylene polymers.

Structure 32 can also be comprised of a first layer of a first propylene polymer of the type of propylene polymer described above in relation to the blend of propylene polymer and second ethylene polymer, and a second layer comprised of an ethylene polymer as described above in relation to first ethylene polymer, blended with a second propylene polymer formed by

the polymerization reaction with a metallocene catalyst system or with a single site catalyst, preferably a metallocene. The second propylene polymer can comprise an interpolymer or copolymer of propylene and an alpha olefin, preferably a C₃-C₂₀ alpha olefin.

While structures or members such as a layer formed of a first polyethylene and structures or members such as a layer, or a collapsible dispensing container head formed of polypropylene usually do not adhere well to each other, as will be explained, structure 32, formed of layer 38 comprised of an ethylene polymer, and layer 40 comprised of a blend of a propylene polymer and a second ethylene polymer, has good interlayer adhesion.

Figure 8 shows a collapsible dispensing tube 36 comprised of a tubular body wall 34 joined at its upper end directly to the shoulder 42 of a head, generally designated 44, having a neck 46 with a dispensing orifice 48. The lower end (not shown) of body wall 34 can be sealed, for example by being brought together and sealed to itself by heat and pressure in a known manner. Head 44 preferably is comprised of a blend of a propylene polymer and a second ethylene polymer which can be such as those described above for layer 40 of Figure 7. Although body wall 34 of collapsible dispensing tube 36 can be a single layer comprised of a first ethylene polymer such as described above for layer 38, as shown in Figure 9, body wall 34 is a two layer structure such as shown in Figure 7, wherein layer 38, comprised of the first ethylene polymer, is the inner layer that is fused or joined directly to, and therefore contiguous to head 42. Layer 40, comprised of the blend of a propylene polymer and a second ethylene polymer is the outer layer. As will be explained, good adhesion is obtained between inner layer 38 and shoulder 42 of head 44.

Figure 10 shows an alternative embodiment of a collapsible dispensing tube of the invention, generally designated 50, having a head 52 in turn having an integral cap 54 joined or attached to head 50 by an integrally formed flexible, living hinge 56. Head 52 can be comprised

of the same polymeric material as head 44 of Figure 8, and body wall 34 can be comprised of the same layers and layer materials as described for Figures 8 and 9.

The present invention includes improved structures, especially packaging structures, comprised of a first structure, component or member bonded to a second structure, component or member, preferably contiguously, wherein one of the structures, members or components is comprised of an ethylene polymer (sometimes referred to herein as a or the first ethylene polymer), and the other of the structures, components or members is comprised of a propylene polymer, and wherein the polymer of either structure is blended with and is a blend of a polymer formed by the polymerization reaction with a metallocene catalyst system, or with a single site catalyst, preferably a metallocene. The so-formed polymer can be an ethylene polymer (sometimes referred to herein as a or the second ethylene polymer) which is blended with the propylene polymer of one of the structures, and/or it can be a propylene polymer (sometimes referred to herein as a or the second propylene polymer) which is blended with the first ethylene polymer of the other structure. The invention is especially concerned with such improved structures, especially packaging structures, wherein the so-formed polymer is a second ethylene polymer, and it is blended with the propylene polymer of the propylene polymer structure. Thus, the present invention includes improved packaging structures where one of the first or second structures, components or members is comprised of a first ethylene polymer, and the other is comprised of a blend of a propylene polymer and a second ethylene polymer. The improved packaging structures have good bond strength, and there is no stress cracking between a first ethylene polymer body layer structure and a propylene polymer container or tube head structure, after the container or tube is exposed to stress crack-inducing agents. Also, desirable properties provided by the propylene polymer to its structure, for example, in providing flexibility to an integral living hinge which integrally joins a cap to a tube head comprised of a blend of propylene polymer and the second ethylene polymer, is not diminished as compared to such a tube head comprised of the propylene polymer without the second ethylene polymer.

The structures of the invention having improved bond strength include any first structure comprised of a first ethylene polymer and any second structure comprised of the blend of a propylene polymer and a second ethylene polymer. The structure can be merely two layers. Preferably, the structure is a packaging structure which can be a container, such as a collapsible dispensing container or tube, or its body wall or head, or a combination of such or other components. Thus, the structure can be comprised of a two layer film, side wall or body wall, wherein one layer is comprised of the first ethylene polymer and the other layer is comprised of the blend of propylene polymer and second ethylene polymer. The structure can also be comprised of such a two layer body or side wall or a single layer body or side wall comprised of first ethylene polymer, where the layer of first ethylene polymer of the single, double or multi-layer body wall is joined to a component of the package such as a collapsible dispensing container or tube head comprised of the blend of propylene polymer and second ethylene polymer.

The first ethylene polymer can be an ethylene homopolymer, copolymer, terpolymer or other interpolymer, or it can be a blend of any of such polymers. The first ethylene polymer can be an ethylene polymer such as described above in connection with layer 38 of Figure 7 or 9. These first ethylene polymers are well known and often employed in the packaging industry. Collapsible dispensing containers or tubes have inner and outer surface layers either or both of which can be bonded to a tube head. Typically, the inner layer is bonded to the tube head and is comprised of LDPE, an LLDPE or a blend thereof. First ethylene polymers suitable for plastic tube extrusion, for lamination or extrusion overcoats, for use as an interior surface layer of collapsible dispensing containers and tubes are well known in the art. Suitable materials for such uses include LDPE's having a melt index of from about 0.10 to about 15.0 g/10min, and a density of from about 0.910 to about 0.940 g/cm³. A preferred LDPE is currently available from Equistar, successor to Millenium Petrochemicals, Inc., under the trade

designation Petrothene® NA-980-000, having a melt index of about 0.25 g/10min and a density of about 0.920 g/cm³. Suitable LLDPE's for such uses may have similar melt index and density characteristics as the aforementioned LDPE's. A suitable first ethylene polymer can be a blend of about 75 wt.% of the above-mentioned LDPE and about 25 wt.% of such an LLDPE.

Propylene polymers which can be employed with the second ethylene polymers in the blends or structures of the invention, i.e., those propylene polymers which are not formed by the polymerization reaction with a metallocene catalyst system, or with a single site catalyst, include those propylene polymers referred to above in connection with layer 40 of Figures 7 and 9. Suitable propylene polymers are known in the art. Generally, suitable polypropylenes can have a melt index of about 0.10 to about 15.0 g/10min, and a density of from about .870 to about .915 g/cm³. Preferably, the propylene polymer, especially when it is a propylene terpolymer or propylene ethylene copolymer, has a melt flow rate of from about .7 to about 6 g/10 min, a density of about 0.870 to about 0.910 g/cm³ and a DSC melting point of about 161°C.

Propylene polymers suitable for use as a single layer structure, or as a layer of a coextruded two-or-more layered structure, such as of a packaging film or of a body or side wall of a collapsible dispensing container or tube, include extrusion grade, high impact strength elastomeric propylene terpolymers derived from propylene and ethylene. The terpolymers can be derived from monomers, including, for example, higher olefins and dienes, capable of imparting elastomeric properties, such as improved impact strength, to the terpolymer. The monomers and the elastomeric propylene terpolymers are known in the art. Preferred propylene terpolymers include terpolymers of propylene, ethylene and a monomer capable of imparting elastomeric properties to the terpolymer. An example of a preferred extrusion grade, high impact strength elastomeric propylene terpolymer is available under the trade designation Montel KS-021P from Himont Incorporated. Typical properties of the terpolymer are a melt flow rate of about 0.9 dg/min (ASTM D-1238), a density of about 0.88 g/cm³ (D792B), an initial hardness

(Shore D) of about 48 (D2240) and after 75 seconds, about 38, a tensile strength at yield (50 mm/min) of about 1.4 K psi (D638), an elongation at yield (50mm/min) of about 40% (D638), a Flexural Modulus (50 mm/min) of about 55 K psi (D790B), a Notched Izod Impact Strength of "nonbreak-flex" at 73°F. and at -40°F., and of 1.1 at -76°F., and a deflection temperature of about 120°F at 66 psi. A preferred propylene polymer suitable for forming a tube head, especially a tube head with a living hinge as shown in Figure 10, is Pro-fax 8623, a general extrusion or injection grade high impact strength polypropylene resin. It is a copolymer of about 75 wt.% polypropylene and about 25 wt.% polyethylene. Pro-fax 8623 is available from and is the trademark of Himont Incorporated. Pro-fax 8623 typically has a melt flow rate of about 2 dg/min (D1238), a density of about 0.9 g/cm³ (D792A-2), a Rockwell hardness, R scale, of 66 (D785A), a tensile strength at yield of about 3,000 psi (D638), an elongation at yield of about 12% (D638), a flexural modulus of about 140,000 psi (D790B), a drop weight impact strength at -20°F. of 44 ft-lbs. (Himont Method), a Notched Izod Impact Strength at 73°F. of about 12 ft-lb/in, and a deflection temperature at 66 psi of about 162°F. (D648). Examples of propylene polymers that may be suitable for use with second ethylene polymers in the blends and structures of the invention include polypropylene compositions comprised of about 60 to 90 parts by weight of polypropylene and about 10 to 40 parts by weight of an ethylene/butene-1 polymeric mixture, such as are described in U.S. Patent No. 4,734,459.

The ethylene polymer that is blended with the propylene polymer, i.e., the second ethylene polymer, includes the ethylene polymers disclosed above in connection with layer 40 of Figures 7 and 9. The second ethylene polymer is formed by the polymerization reaction with a metallocene catalyst system, or with a single site catalyst, for example, a metallocene. The second ethylene polymer can be linear or substantially linear. It can be a copolymer of ethylene, preferably a copolymer of ethylene and an alpha olefin, for example a C₃ to C₂₀ alpha olefin, preferably butene-1. More preferably, the second ethylene polymer is a linear ethylene butene-1 copolymer. "Linear" polymers are herein understood to mean that the polymers have no or no

detected long chain branching. "Substantially linear" polymers are disclosed in patent literature as meaning that the polymer backbone is either unsubstituted or substituted with up to 3 long chain branches/1000carbons. Such is herein understood to mean that such polymers have some long chain branching. The second ethylene polymer can have a melt index of about 0.10 to about 15.0 dg/min., preferably about 3.5 to about 4.5 dg/min., a density of from about .880 to about .920 g/cm³, more preferably from about .890 to about .915 g/cm³, and most preferably from about .900 to about .912 g/cm³, and a preferred DSC peak melting point of from about 92 to about 98 °C. Preferred linear ethylene butene-1 copolymers are available under the trade designations Exact™ 3024 and Exact™ 3027 from Exxon Chemical. Exact is a trademark of Exxon Chemical. These second ethylene polymers are produced using Exxon Chemical's EXXPOL technology.

TYPICAL PROPERTIES OF EXACT 3024 AND 3027 POLYMERS AND FILMS*

	Exact 3024	Exact 3027	Units	ASTM Method
<u>Polymer Properties</u>				
Melt Index	4.5	3.5	dg/min	D-1238(E)
Density	0.905	0.900	g/cm ³	D-792
DSC Peak Melting Point	98	92	°C	Exxon Method
<u>Film Properties</u>				
1% secant Modulus			psi	D-882
MD	13100	10100		
TD	14300	11500		
Tensile Strength at Yield			psi	D-882
MD	870	770		
TD	690	620		
Tensile Strength at Break			psi	D-882
MD	6900	8160		
TD	3960	5210		
Elongation at Break			%	D-882
MD	390	450		
TD	660	700		
Elmendorf Tear Strength			g/mil	D-1922

MD	180	60		
TD	160	200		
Dart Drop Impact, F ₅₀	170	410	g/mil	D-1709
Puncture, Force	8.1	7.3	lbs/mil	Exxon Method
Energy	24.1	24.7	in-lbs/mil	
Total Energy Impact			ft-lbs	D-4272
At Room Temperature	0.9	1.2		
At -29°F	0.7	0.7		
Haze	0.5	0.4	%	D-1003
Gloss	96	98	%	D-2457

*0.8 mil films produced on a 3.5" cast film line at 500 ft/min take-off speed and a melt temperature between 500 and 535°F.

The blend of propylene polymer and a second ethylene polymer can comprise any suitable minor amount, i.e., less than 50 wt.%, of second ethylene polymer, the remainder being propylene polymer. Preferably, the blend comprises about 5 to about 49 wt.% of second ethylene polymer and about 51 wt.% to about 95 wt.% of propylene polymer, more preferably, about 70 to about 90 wt.% of propylene polymer, and about 10 to about 30 wt.% of second ethylene polymer.

For a two layer film or body wall of a collapsible dispensing tube comprised of a first layer of first ethylene polymer, preferably the LDPE Petrothene NA-980-000, bonded with good bond strength to a second layer of a blend propylene polymer and second ethylene polymer preferably comprised of the propylene terpolymer Montel KS-021P, the blend preferably is comprised of from about 85 to about 90 wt.% of the propylene terpolymer, and about 10 to about 15 wt.% of second ethylene polymer, preferably the linear ethylene butene copolymer Exact 3024. The following two-layer body wall structures comprised of these materials were produced:

EXAMPLE 25

Structure A

Layer 1
Layer 2

Composition

LDPE - Petrothene NA-980-000
Blend of: 90 wt.% Montel KS-012P, and
10 wt.% Exact 3024

Structure B

Layer 1
Layer 2

LDPE - Petrothene NA-980-000
Blend of: 85 wt.% Montel KS-021P, and
15 wt.% Exact 3024

The two-layer structures were about 0.018 inch thick, the outer blend layer being about 30% and the inner LDPE layer being about 70% of the total thickness of the structure. The two layer structures were formed by a water quenched tubular coextrusion process during which the continuous tubular extrudate was vacuum calibrated by being expanded in a tubular vacuum chamber. The chamber's interior diameter was about 1.5 inch. The continuous tubular extrudate was cut into ten (10) tubular bodies, each 5 inches long. The tubular bodies had an internal diameter of about 1.509 inch, an external diameter of about 1.545 inch, and a wall thickness of about .036 inch. These tubular bodies were suitable for use as the body wall of a collapsible dispensing tube.

Adhesive Strength Test of Two-Layer Structures

The two layer tubular body wall structures shown as Structures A and B in Example 25 were tested for adhesive or bond strength. Strips $\frac{1}{4}$ inch wide were cut from the tubular bodies. The strips were mechanically held at one end and attempts were made at the other end of the strips to manually peel the outer layer away from the inner layer. While slight delamination

occurred with control strips made from similar strips cut from similarly made two-layer coextruded tubular bodies having an outer layer of 100 wt.% of the propylene terpolymer Montel KS-012P and an inner layer of 100 wt.% of the LDPE Petrothene® NA-980-000, the strips of the two-layer tubular body wall Structures A and B of the invention had good bond strength. Their layers could not manually be pulled apart.

Additional test strips were made of two-layer water quenched coextruded tubular bodies, i.e., body wall structures, of the invention, these having an outer layer blend of 20 wt.% of the ethylene butene plastomer Exact 3024 and 80 wt.% of the propylene terpolymer Montel KS-012P, and a contiguous inner layer of 100% of the LDPE Petrothene® NA-980-000. These were tested as above and found to have good bond strength. However, the latter tubular bodies were less than wholly desirable for uses requiring a smooth outer surface feel, because the exterior surface of the outer blend layer of these test strips had a granular surface feel when passed against a person's lips.

Similar strips cut from two-layer tubular bodies of the invention obtained as above but whose outer layer blend contained 30% by weight Exact 3024 and the balance Montel KS-012P, were tested and found to have a good bond strength. They had an outer layer surface feel to the lips that was worse than those strips having 20% by weight of Exact 3024.

Similar strips obtained from similarly made two-layer tubular bodies of the invention having an outer layer blend of about 10 wt.% of second ethylene polymer Exact 3024 and about 90 wt.% of propylene polymer Montel KS-012P, a contiguous inner layer of the LDPE, Petrothene NA-980-000, and an outer to inner layer thickness ratio is 1:1, were tested and found to have good bond strength and a desirable smooth feel to the outer layer.

From the above tests, it was found that two-layer structures of the invention having an outer layer of a blend of from about 10 to about 30 wt.% of a second ethylene alpha olefin copolymer made from a polymerization reaction with a single site catalyst, and from about 70 to about 90 wt.% of a propylene polymer, and having a contiguous inner layer of first ethylene polymer, had improved adhesive strength as compared to a two-layer coextruded film having an

outer layer of 100% propylene ethylene polymer and an inner layer of a first ethylene polymer. It was also found that two-layer films of the invention having an outer layer of from about 10 to less than about 20 wt.% of an ethylene butene copolymer made from a single site metallocene catalyst and at least 80 to about 90 wt.% of a propylene polymer, and a contiguous inner layer of a first ethylene polymer, had an outer layer which for some uses had a more desirable, softer feel than the outer layer of similar structures having from about 20 to about 30 wt.% of the ethylene butene copolymer.

Bond Strength of Tubular Body Walls to Tube Heads

In order to test the adhesive or bond strength of a tubular body wall having an inner layer of a first ethylene polymer to a collapsible dispensing tube head made of blend materials of the invention which are disclosed as comprising the tube head shown in Figure 8, four sets of such collapsible dispensing tube heads were injection molded and, during the process, fusion bonded to tubular body walls in a conventional manner described herein. These unfilled collapsible dispensing tubes were tested for head/body wall bond integrity and stress cracking. For a first test, four variables of blend materials were used to form the heads. Variables were 1 through 3 were blend materials of the invention.

First Set Of Tube Head Variables And Tests

<u>Variables</u>	<u>Head Resin Material</u>
1	Blend of 70% polypropylene (PP)/30% LDPE*
2	Blend of 80% PP/20% LDPE**
3	Blend of 70% PP/30% LDPE**
4	Control: 100% LDPE

The PP of the blends was Pro-fax 8623, a propylene-ethylene copolymer comprising about 75 wt.% PP and about 25 wt.% polyethylene, based on the weight of the copolymer. The properties of Pro-fax 8623 are presented above. The LDPE* of the blend of Variable 1 was

Exact 3027 and the LDPE** of the blends of Variables 2 and 3 was Exact 3024, each Exact material being a linear ethylene butene plastomer made from a polymerization reaction using a metallocene single site catalyst whose properties are presented above. The LDPE used to form the Control head (Variable 4) is available under the trade designation Rexene 1011 from Huntsman, Corp. The LDPE of the Control head has a melt flow rate of about 1.0 g/10min (ASTM D1238-E), and a density of about .9205 g/cm³ (ASTM-D792). The heads which were tested for bond strength and which were flex tested had a threaded neck for receiving a threaded cap, as shown in Figure 8.

Five sample tube heads were injection molded of the material of each variable. Sample tubes were made. Each of the sample tube heads was fusion bonded to a 1 3/8 inch diameter extruded single layer LDPE tubular body wall made of Petrothene NA-980-000, or an LDPE having a melt index of about 1.2 g/10 min. and a density of about .920 g/cm³, available under the trade designation LDPE 2020T from E. I. DuPont de Nemours and Company.

First Head/Body Wall Bond Integrity Test

Each of the tubes made from the five samples of each head variable and of the Control was tested for head/body wall bond integrity. The tubular bodies were fusion bonded to the shoulders of the heads by placing an end of the tubular body in an injection mold and injecting the blend of propylene polymer and a second ethylene polymer material into a mold such that the end of the LDPE blend inner layer of the body wall was fused to the shoulder of the tube head. The tubular body walls were cut transaxially 2 inches from the shoulder. A 2" long 1/4 inch wide strip of the body wall was cut from the open end of the transaxial cut edge of the body wall up to but not including the shoulder, where the strip was left as-bonded to the shoulder. One inch of the strip was clamped into the top clamp and one inch of the tube body was clamped to the bottom clamp of an Instron tensile strength tester. The load cell of the tester was 100KG. With the strip disposed at about 90° to the longitudinal axis of the tube, the jaws were separated at a rate of about 8 inches per minute until the strip fractured or separated from the head. Peak Instron tensile strength values are shown in TABLE I below.

TABLE I

<u>Variable</u>	<u>Instron Tensile Pulls (KG)</u>					<u>Average</u>
1	4.88	5.88	4.0	4.36	3.85	4.6
2	3.57	3.0	2.53	2.24	3.65	3.0
3	5.08	3.97	5.7	4.37	3.87	4.6
4	5.18	4.93	4.39	6.27	5.75	5.3

The Instron test results in TABLE I indicate good head/body wall integrity for each variable and for the Control. All tubes tested above 1.2KG which was the minimum acceptable value. Strips from all variables failed only by eventual fracturing, except for Variable 2 (80% PP/20% LDPE Blend) which had lower tensile values and failed by layer interface separation prior to breakage. The Instron tensile strength values shown in TABLE I are all well above 1.2KG and, as shown below, are superior to the values obtainable from attempting to bond the LDPE body wall layer to a tube head made of 100% propylene/ethylene copolymer, with respect to which no bond was obtained.

Second Set of Tube Head Variables and Test

For a second test, a second set of five variables of blend materials were used to form a second set of tube heads. In this test, Variables 6 through 8 were blend materials of the invention.

<u>Variables</u>	<u>Head Resin Material</u>
5	Control: 100% PP
6	Blend of 90% PP/10% LDPE*
7	Blend of 80% PP/20% LDPE*
8	Blend of 70% PP/30% LDPE*
9	Control 100% HDPE

For the second set of variables, the PP of the blends was Pro-fax 8623 and the LDPE* of the blends was EXACT 3027. The propylene polymer (PP) used to form the Control head, Variable 5, was Pro-fax 8623. The HDPE used to form the Control head, Variable 9, was HDPE Alathon M4612 available from Equistar Chemicals and having a melt index of about 1.2 g/cm³ and a density of from about .944 to about .948 g/cm³. The heads which were tested for bond strength had a shoulder, a neck, a cap and a living hinge that integrally joined the cap to the neck, as shown in Figure 10.

Six sample tube heads were injection molded of the material of each variable. Sample tube heads were made. Each of the sample tube heads was fusion bonded to a 1 3/8 inch diameter extruded single layer tubular body wall made of the LDPE Petrothene NA-980-000.

Second Head/Body Wall Bond Integrity Test

Each of the tubes made from the six samples of each Variable 5 through 8 was tested for head/body wall bond integrity. The tubular bodies were fusion bonded to the shoulders of the tube heads as in the first test, and the same test procedure was employed as the in the first test. Peak Instron tensile strength values are shown in TABLE II below.

TABLE II

<u>Variable</u>	<u>Instron Tensile Pulls (KG)</u>							<u>Average</u>
5	N	N	N	N	N	N	N	N
6	N	N	N	N	N	N	N	N
7	1.007	1.5557	1.471	1.098	1.391	.7168	1.207	
8	3.350	2.821	3.125	2.870	3.799	2.615	3.1	
9	2.902	2.819	2.795	2.977	3.122	2.730	2.89	

"N" indicates no bond was achieved even with attempts to use various injection pressures and temperatures.

The Instron test results in TABLE II indicate that no head/body wall bond was achieved for Variable 5 (Control 100% PP head) and Variable 6 (Head blend of 90% PP/10% LDPE*), an average minimally acceptable bond was achieved for Variable 7 (Head blend of 80% PP/20% LDPE*), and a satisfactory bond was achieved for Variable 8 (Head blend of 70% PP/30% LDPE*). The average bond for Variable 8 was greater than the average bond for Variable 9 (100% HDPE head).

Head Stress Crack Test

Five collapsible dispensing tubes taken from each of the Variables and from the Control of the lot of tubes made and first tested above for head/body wall bond strength were filled with a solution of 20% Nonox (nonoxynol-9 polyethylene glycol) available under the trade designation Igepal CO-630 from GAF, and 80% ethyl alcohol, in one series of tests, and with a solution of 20% Igepal and 80% water in another series of tests, to chemically accelerate aging of the tube head and body wall materials and thereby generate stress cracks at the bonded interface of the inner layer of the body wall and the shoulder of the tube head. The bottom ends of the filled tubes were sealed with clamps and placed and held in an oven at about 140°F. for various time periods ranging from 3 to 19 days. The head stress cracks (HSC) and side stress cracks (SSC) which resulted are shown in TABLE III below.

TABLE III

Using: 20% Igepal/80% Alcohol (HSC/SSC)

<u>Variables</u>	3 days	7 days	14 days	19 days
1	0/0	0/2	0/1	0/0
2	0/0	0/0	0/1	0/0
3	0/0	0/2	0/0	0/0
Control	0/0	0/0	0/2	0/0

Using: 20% Igepal/80% Water

<u>Variables</u>	3 days	7 days	14 days	19 days
1	0/0	0/0	0/1	0/0
2	0/0	0/0	0/0	0/0
3	0/0	0/0	0/0	0/0
Control	0/0	0/0	0/0	0/0

Table III shows that no head stress cracks were generated for any of the Variables or for the Control. While some side stress cracks (stress cracks of the tubular body wall) occurred, they were located next to the clamped end seal, well away from the head/body wall bond. These stress cracks are thought to have resulted from the stresses imparted by the end clamps.

Head Hinge Flex Tests

Collapsible dispensing tube heads having a cap integrally joined to the head by an integral living hinge or strap, as shown in Figure 10, were flex tested. The tube heads were injection molded using the same materials as used for the variable and control materials employed in the first head/body wall bond integrity test and in the head stress crack test. Five tube heads of each variable and of the control were made, and the cap of each tube was mechanically moved from the open to closed to open positions (1 cycle) for 10,000 cycles without interruption. While two of the five control samples exhibited partial fracturing of the hinge, the hinges of all of the variables of the heads were satisfactory. They showed no signs of failure.

The above tests show that employing a blend of a second ethylene polymer, preferably an ethylene alpha-olefin copolymer made by a polymerization reaction using a single site catalyst, with a propylene polymer, preferably a propylene-ethylene copolymer, preferably in

range of from about 20 to about 30 wt.%, more preferably from about 25 to about 30 wt.% of second ethylene polymer, with about 70 to about 80 wt.%, more preferably from about 70 to about 75 wt.% of propylene polymer, improves the bond strength of a collapsible tube head to a tubular body wall inner layer comprised of a first ethylene polymer, for example a LDPE. This is accomplished while maintaining, or without detracting from the flexibility or flex endurance through 10,000 open-close cycles of an integral living hinge of the head, as compared to the living hinge of a head made of 100% propylene polymer. Thus, a tube body wall layer or another layer, film or structure comprised of a first ethylene polymer can now be satisfactorily bonded to a layer, tube head or other structure made or comprised of a propylene polymer, if the propylene polymer is blended with a minor amount of a second ethylene polymer made by a polymerization reaction with a metallocene catalyst system, or with a single site catalyst, which can be a metallocene.

The present invention includes methods for improving the adhesion between two packaging structures, for example, between a first structure or layer comprising a first ethylene polymer and a contiguous second structure or layer comprising a propylene polymer, or for improving the adhesion between a collapsible dispensing container or tube head comprised of a propylene polymer and a collapsible dispensing tube body wall layer comprised of a first ethylene polymer, wherein the method comprises blending with the first ethylene polymer which is to form the first structure or layer and/or with the propylene polymer which is to form the second structure or layer or the tube head, a polymer formed by the polymerization reaction with a metallocene catalyst system, or with a single site catalyst, which can be a metallocene. In the method of the invention, the polymer which is blended can comprise a propylene polymer, and the propylene polymer is blended with the first ethylene polymer. Preferably, the polymer which is blended comprises a second ethylene polymer, and the second ethylene polymer, preferably a minor amount, is blended with the propylene polymer which is to form the second layer, or the tube head. The amount of the so-formed polymer which is blended, is any suitable amount

given the materials and structures involved. The amounts to be blended are disclosed above. The so-formed polymer can be blended and extruded by conventional means and methods. For example, pellets of a second ethylene polymer such as Exact 3024, can be physically mixed or blended with pellets of the propylene polymer and fed to a conventional extruder in which the mixture of pellets is melt blended and coextruded through a tubular die operated under standard tube manufacturing conditions well known in the art.

Throughout the description and claims of this specification, the word "comprise" and variations of the word, such as "comprising" and "comprises", is not intended to exclude other additives, integers or process steps.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214

The claims defining the invention are as follows:

1. A collapsible dispensing container comprising a layer of a polymer formed by the polymerization reaction with a single site catalyst.
2. The container according to claim 1 wherein the layer comprises an ethylene polymer formed by the polymerization reaction with a single site catalyst.
3. The container according to claim 2 wherein the layer comprises a propylene polymer formed by the polymerization reaction with a single site catalyst.
4. The container of claim 1 wherein the polymer is a copolymer of ethylene.
5. The container of claim 1 wherein the polymer is a copolymer of ethylene and a C₃-C₂₀ alpha olefin.
6. The container according to claims 1-5 wherein the single site catalyst is a metallocene.
7. The container according to claim 5 wherein the alpha olefin is butene-1.
8. The container according to claim 5 wherein the alpha olefin is hexene-1.
9. The container according to claim 5 wherein the alpha olefin is 4-methyl pentene-1.
10. The container according to claim 5 wherein the alpha olefin is octene-1.
11. The container of claim 5 wherein the polymer is a blend of the copolymer of ethylene and an alpha olefin with a polyolefin.
12. The container according to claim 11 wherein the polyolefin is a low density polyethylene.

13. The container according to claim 11 wherein the polyolefin is a linear low density polyethylene.
14. The container according to claim 11 wherein the polyolefin is an ethylene vinyl acetate.
15. The container according to claim 11 wherein the polyolefin is a copolymer of ethylene and an alpha olefin formed by the polymerization reaction with a single site catalyst.
16. The container of claim 11 wherein the polyolefin comprises a propylene polymer.
17. The container of claim 16 wherein the propylene polymer comprises an elastomeric terpolymer of propylene and ethylene.
18. The container of claim 16 wherein the copolymer of ethylene and an alpha olefin comprises about 10 to about 15 wt.%, and the propylene polymer comprises about 85 to about 90 wt.% of the blend.
19. The container of claim 17 wherein the copolymer of ethylene and an alpha olefin comprises about 10 to about 15 wt.%, and the elastomeric terpolymer of propylene and ethylene comprises about 85 to about 90 wt.% of the blend.
20. The container of claim 19 wherein the copolymer of ethylene and an alpha olefin is a linear ethylene alpha olefin copolymer.
21. The container of claim 20 wherein the copolymer of ethylene and an alpha olefin is a linear ethylene butene-1 copolymer.
22. The container of claim 21 wherein the linear ethylene butene-1 copolymer has a melt index of about 3.5 to about 4.5 dg/min.

23. The container of claim 21 wherein the linear ethylene butene-1 copolymer has a density of about 0.900 to about 0.905 g/cm³.
24. The container of claim 17 wherein the terpolymer has a melt flow rate of about 0.9 dg/min., and a density of about 0.88 g/cm³.
25. The container of claim 16 wherein the propylene polymer comprises a copolymer of propylene and ethylene.
26. The container of claim 25 wherein the copolymer of propylene and ethylene comprises about 75 wt.% polypropylene and about 25 wt.% polyethylene, based on the weight of said copolymer.
27. The container of claim 26 wherein the copolymer of propylene and ethylene has a density of about 0.899 to about 0.903 g/cm³, and a melt flow rate of about 2 g/10 min.
28. The container of claim 16 wherein the copolymer of ethylene and an alpha olefin comprises from about 20 to about 30 wt.%, and the propylene polymer comprises about 70 to 80 wt.% of the blend.
29. The container of claim 28 wherein the copolymer of ethylene and an alpha olefin comprises an ethylene butene-1 copolymer, and the propylene polymer comprises a copolymer of propylene and ethylene comprising about 75 wt.% polypropylene and about 25 wt.% polyethylene, based on the weight of the propylene polymer.
30. The container of claim 29 wherein the copolymer of ethylene and an alpha olefin comprises a linear ethylene butene-1 copolymer.
31. The container of claim 29 or 30 wherein the copolymer of propylene and ethylene has a density of about 0.899 to about 0.903 g/cm³, and a melt flow rate of about 2 g/10 min.

32. A collapsible dispensing container having a body wall comprised of a layer comprising a first ethylene polymer, and a contiguous layer comprised of a propylene polymer blended with a second ethylene polymer formed by a polymerization reaction with a single site catalyst.

33. A collapsible dispensing container in the form of a tube, which comprises:
a head having a dispensing orifice and a shoulder, and
a body wall joined directly to the head by a layer comprised of a first ethylene polymer, the head being comprised of a blend of a propylene polymer and a second ethylene polymer formed by the polymerization reaction with a single site catalyst.

34. The container of claim 32 or 33 wherein the single site catalyst is a metallocene.

35. A container according to claim 32 or 33 wherein the ethylene polymer is formed by a polymerization reaction with a metallocene catalyst system.

36. The container of claim 32 or 33 wherein the propylene polymer comprises polypropylene.

37. The container of claim 32 or 33 wherein the propylene polymer comprises a propylene copolymer.

38. The container of claim 32 or 33 wherein the propylene polymer is a copolymer of propylene and ethylene.

39. The container of claim 32 or 33 wherein the propylene polymer is an elastomeric terpolymer of ethylene and propylene.

40. The container of claim 32 or 33 wherein the second ethylene polymer is a copolymer of ethylene and an alpha olefin.

41. The container of claim 32 or 33 wherein the second ethylene polymer is an interpolmer of ethylene and a C₃-C₂₀ alpha olefin.

42. The container of claim 32 or 33 wherein the second ethylene polymer is a copolymer of ethylene and butene-1.

43. The container of claim 32 or 33 wherein the second ethylene polymer is a linear ethylene butene-1 copolymer.

44. The container of claim 32 or 33 wherein the propylene polymer is a terpolymer of ethylene, propylene and a monomer capable of imparting elastomeric properties to the terpolymer, the second ethylene polymer is an ethylene butene-1 copolymer, and the blend comprises about 10 to about 15 wt.% of the terpolymer and about 85 to about 90 wt.% of the ethylene butene-1 copolymer.

45. The container of claim 44 wherein the second ethylene polymer is a linear ethylene butene-1 copolymer.

46. The container of claim 32 or 33 wherein the first ethylene polymer is a low density polyethylene.

47. The container of claim 44 wherein the first ethylene polymer is a low density polyethylene.

48. The container of claim 45 wherein the first ethylene polymer is a low density polyethylene.


49. The container of claim 32 or 33 wherein the first ethylene polymer is a high density polyethylene.

50. The container of claim 43 wherein the linear ethylene butene-1 copolymer has a melt index of about 3.5 to about 4.5 dg/min.


51. The container of claim 43 wherein the linear ethylene butene-1 copolymer has a density of about 0.900 to about 0.905 g/cm³.

52. The container of claim 45 wherein the terpolymer has a melt flow rate of about 0.9 dg/min, and a density of about 0.88 g/cm³.

53. The container of claim 33 wherein the propylene polymer is a copolymer of propylene and ethylene and the copolymer comprises about 75 wt.% polypropylene and about 25 wt.% polyethylene based on the weight of the copolymer.



54. The container of claim 53 wherein the copolymer of propylene and ethylene has a density of about 0.899 to about 0.903 g/cm³, and a melt flow rate of about 2 g/10 min.



55. The container of claim 54 wherein the second ethylene polymer is a copolymer of ethylene and an alpha olefin and comprises about 20 to about 30 wt.%, and the copolymer of propylene and ethylene comprises about 70 to 80 wt.% of the blend.




56. The container of claim 55 wherein the copolymer of ethylene and an alpha olefin comprises an ethylene butene-1 copolymer, and the propylene polymer comprises a copolymer of propylene and ethylene comprising about 75 wt.% polypropylene and about 25 wt.% polyethylene, based on the weight of the propylene polymer.

57. The container of claim 56 wherein the copolymer of ethylene and an alpha olefin comprises a linear ethylene butene-1 copolymer.

58. The container of claim 56 or 57 wherein the copolymer of propylene and ethylene has a density of about 0.899 to about 0.903 g/cm³, and a melt flow rate of about 2 g/10 min.

59. A method for improving the adhesion between a first layer comprising a first ethylene polymer and a contiguous second layer comprising a propylene polymer, which comprises:
blending with with the first ethylene polymer which is to form the first layer, and/or with the propylene polymer which is to form the second layer, a second ethylene polymer formed by the polymerization reaction with a single site catalyst.

60. A method for improving the adhesion between a collapsible dispensing tube head comprised of a propylene polymer and a collapsible dispensing tube body wall layer comprised of a first ethylene polymer, which comprises:
blending with the propylene polymer which is to form the head, a second ethylene polymer formed by the polymerization reaction with a single site catalyst.



61. The method of claim 59 or 60 wherein the single site catalyst is a metallocene.



62. The method of claim 59 or 60 wherein the second ethylene polymer that is blended is formed by the polymerization reaction with a metallocene catalyst system.



63. The method of claim 59 or 60 wherein the propylene polymer comprises polypropylene.



64. The method of claim 59 or 60 wherein the propylene polymer comprises a propylene copolymer.



65. The method of claim 59 or 60 wherein the propylene polymer is a copolymer of propylene and ethylene.

66. The method of claim 59 or 60 wherein the propylene polymer is an elastomeric terpolymer of ethylene and propylene.

67. The method of claim 59 or 60 wherein the second ethylene polymer is a copolymer of ethylene and an alpha olefin.

68. The method of claim 59 or 60 wherein the second ethylene polymer is an interpolymers of ethylene and a C₃-C₂₀ alpha olefin.

69. The method of claim 59 or 60 wherein the second ethylene polymer is an elastomeric terpolymer of ethylene and butene-1.

70. The method of claim 59 or 60 wherein the second ethylene polymer is a linear ethylene butene-1 copolymer.

71. The method of claim 59 or 60 wherein the propylene polymer is an elastomeric terpolymer of ethylene, propylene and a monomer capable of imparting elastomeric properties to the terpolymer, the second ethylene polymer is an ethylene butene-1 copolymer and the blend comprises about 10 to about 15 wt.% of the terpolymer and about 85 to about 90 wt.% of the ethylene butene-1 copolymer.

72. The method of claim 71 wherein the second ethylene polymer is a linear ethylene butene-1 copolymer.

73. The method of claim 59 or 60 wherein the first ethylene polymer comprises a low density polyethylene.

74. The method of claim 71 wherein the first ethylene polymer comprises a low density polyethylene.

75. The method of claim 72 wherein the first ethylene polymer comprises a low density polyethylene.

76. The method of claim 59 or 60 wherein the first polyethylene polymer comprises a high density polyethylene.

77. The method of claim 70 wherein the linear ethylene butene-1 copolymer has a melt index of about 3.5 to about 4.5 dg/min.

78. The method of claim 70 wherein the linear ethylene butene-1 copolymer has a density of about 0.900 to about 0.905 g/cm³.

79. The method container of claim 72 wherein the terpolymer has a melt flow rate of about 0.9 dg/min, and a density of about 0.88 g/cm³.

80. The method of claim 60 wherein the propylene polymer is a copolymer of propylene and ethylene and the copolymer comprises about 75 wt.% polypropylene and about 25 wt.% polyethylene based on the weight of the copolymer.

81. The method of claim 80 wherein the copolymer of propylene and ethylene has a density of about 0.899 to about 0.903 g/cm³, and a melt flow rate of about 2 g/10min.

82. The method of claim 81 wherein the second ethylene polymer is a copolymer of ethylene and an alpha olefin and comprises from about 20 to about 30 wt.%, and the copolymer of propylene and ethylene comprises about 70 to 80 wt.% of the blend.

83. The method of claim 82 wherein the copolymer of ethylene and an alpha olefin comprises an ethylene butene-1 copolymer, and the propylene polymer comprises a copolymer of propylene and ethylene comprising about 75 wt.% polypropylene and about 25 wt.% polyethylene, based on the weight of the propylene polymer.

84. The method of claim 83 wherein the copolymer of ethylene and an alpha olefin comprises a linear ethylene butene-1 copolymer.

85. The method of claim 83 or 84 wherein the copolymer of propylene and ethylene has a density of about 0.899 to about 0.903 g/cm³, and a melt flow rate of about 2 g/10min.

86. The method of claim 83 or 84 wherein the first ethylene polymer is comprised of low density polyethylene.

87. The method of claim 83 or 84 wherein the first ethylene polymer is comprised of high density polyethylene.

88. A method for improving the adhesion between a collapsible dispensing tube head comprised of a propylene polymer and a collapsible dispensing tube body wall layer comprised of a first ethylene polymer, which comprises:

blending with the propylene polymer which is to form the head and/or with the first ethylene polymer which is to form the tube body wall layer, a polymer formed by the polymerization reaction with a single site catalyst.

89. The method of claim 88 wherein said polymer which is blended comprises a propylene polymer formed by the polymerization reaction with a single site catalyst, and said propylene polymer is blended with the first ethylene polymer.

90. The method of claim 59 or 60 wherein the propylene polymer of the blend comprises about 70 to about 90 wt.% and the second ethylene polymer comprises about 10 to about 30 wt.% of the blend.

91. The method of claim 59 or 60 wherein the blend of the propylene polymer and the second ethylene polymer is used to form the head of a collapsible dispensing container, the head having an integral cap that is integrally joined to the head by a living hinge.

92. The method of claim 59 or 60 wherein the second ethylene polymer comprises about 5 to about 49 wt.%, and the propylene polymer comprises about 51 to about 95 wt.% of the blend.

93. The method of claim 60 wherein the second ethylene polymer is a copolymer of ethylene and a linear alpha olefin and comprises about 25 to about 30 wt.%, and the propylene polymer is a copolymer of propylene and ethylene comprises about 75 to 80 wt.% of the blend.

94. The method of claim 93 wherein the copolymer of ethylene and a linear alpha olefin is a linear copolymer of ethylene and 1-butene, and said copolymer has a melt index of about 3.5 dg/min. and a density of about .900 g/cm³.

95. The container of claim 1 or 33 wherein the propylene polymer of the blend comprises about 70 to about 90 wt.% and the second ethylene polymer comprises about 10 to about 30 wt.% of the blend.

96. The container of claim 59 or 60 wherein the head has an integral cap that is integrally joined to the head by a living hinge.

97. The container of claim 16 wherein the copolymer of ethylene and an alpha olefin comprises about 5 to about 49 wt.%, and the propylene polymer comprises about 51 to about 95 wt.% of the blend.

98. The container of claim 32 or 33 wherein the second ethylene polymer comprises about 5 to about 49 wt.%, and the propylene polymer comprises about 51 to about 95 wt.% of the blend.

99. The container of claim 33 wherein the second ethylene polymer is a copolymer of ethylene and a linear alpha olefin and comprises about 25 to about 30 wt.%, and the propylene polymer is a copolymer of propylene and ethylene comprises about 75 to 80 wt.% of the blend.

100. The container of claim 96 wherein the copolymer of ethylene and a linear alpha olefin is a linear copolymer of ethylene and 1-butene, and said copolymer has a melt index of about 3.5 dg/min. and a density of about .900 g/cm³.

101. The container, according to claim 1, 32 or 33 substantially as hereinbefore described with reference to any one of the examples or drawings.

102. The method, according to claim 59 or 60, substantially as hereinbefore described with reference to any one of the examples or drawings.

5

DATED: 24 September, 1998

PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

AMERICAN NATIONAL CAN COMPANY

10

David B Fitzpatrick

50
50
50
50
50
50
50
50

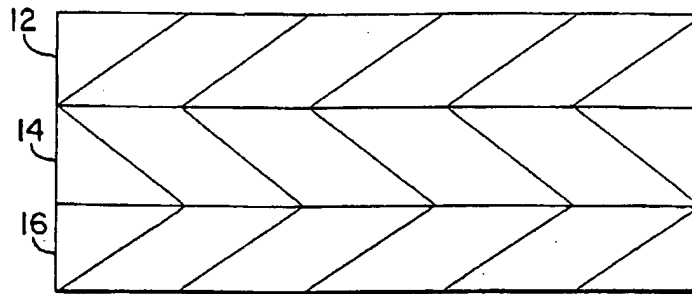


FIG. 1

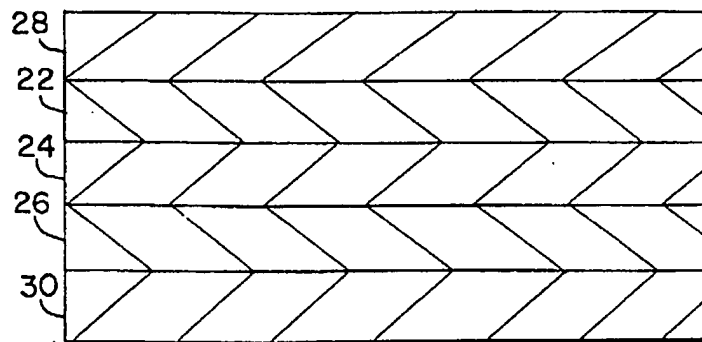


FIG. 2

20
21
22
23
24
25
26
27

24 09 99 07015

2/3



FIG. 3




FIG. 4




FIG. 5




FIG. 6

87015/98

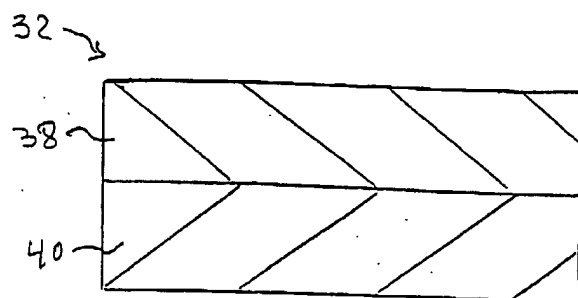


FIG. 7

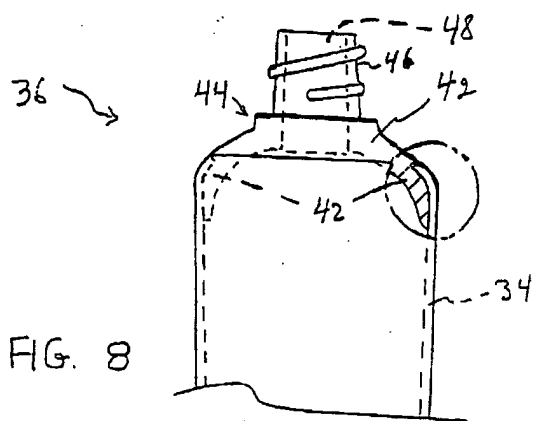


FIG. 8




FIG. 9

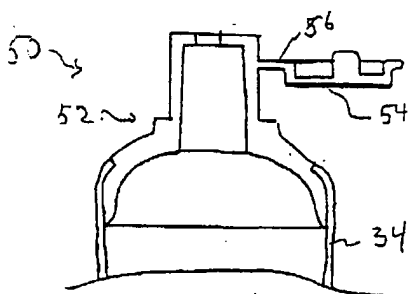


FIG. 10